


12 1/2 Inch Natural Mount Head Cable Tie - 100 Pack



1. MATERIAL Natural: Polyamide 6.6 natural
2. MATERIAL Black: Polyamide 6.6 natural+ ~1-2% carbon black
3. Flammability of raw material : UL 94 - V2
4. Humidity absorption: 2,7% - 2,8% (23° C - 50% R.H.)
5. Installation temperature: $-10^{\circ} \text{C} \div +85^{\circ} \text{C}$ ($14^{\circ} \text{F} \div +185^{\circ} \text{F}$)
6. Working temperature: $-40^{\circ} \text{C} \div +85^{\circ} \text{C}$ ($-40^{\circ} \text{F} \div +185^{\circ} \text{F}$)
7. Max sustainable temperature for short time: $+110^{\circ} \text{C}$
8. Good resistance to bases, oils, greases, oil derivates, chloride solvents. Limited resistance to acids. Not resistant to phenols.
9. Carbon black addition gives a better UV resistance
10. comply with UL62275 Type 21
11. AH-2 Plenum rating

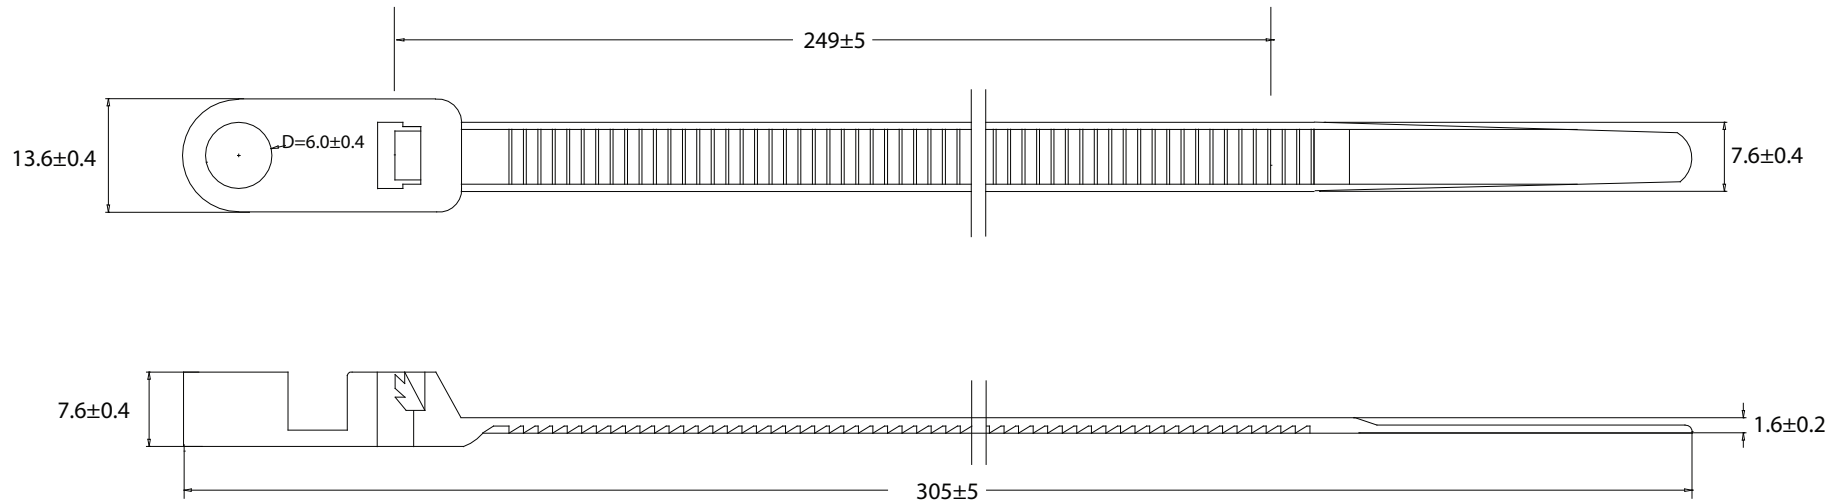