



**NOTE:ALL MATERIAL ARE RoHS COMPLIANT**

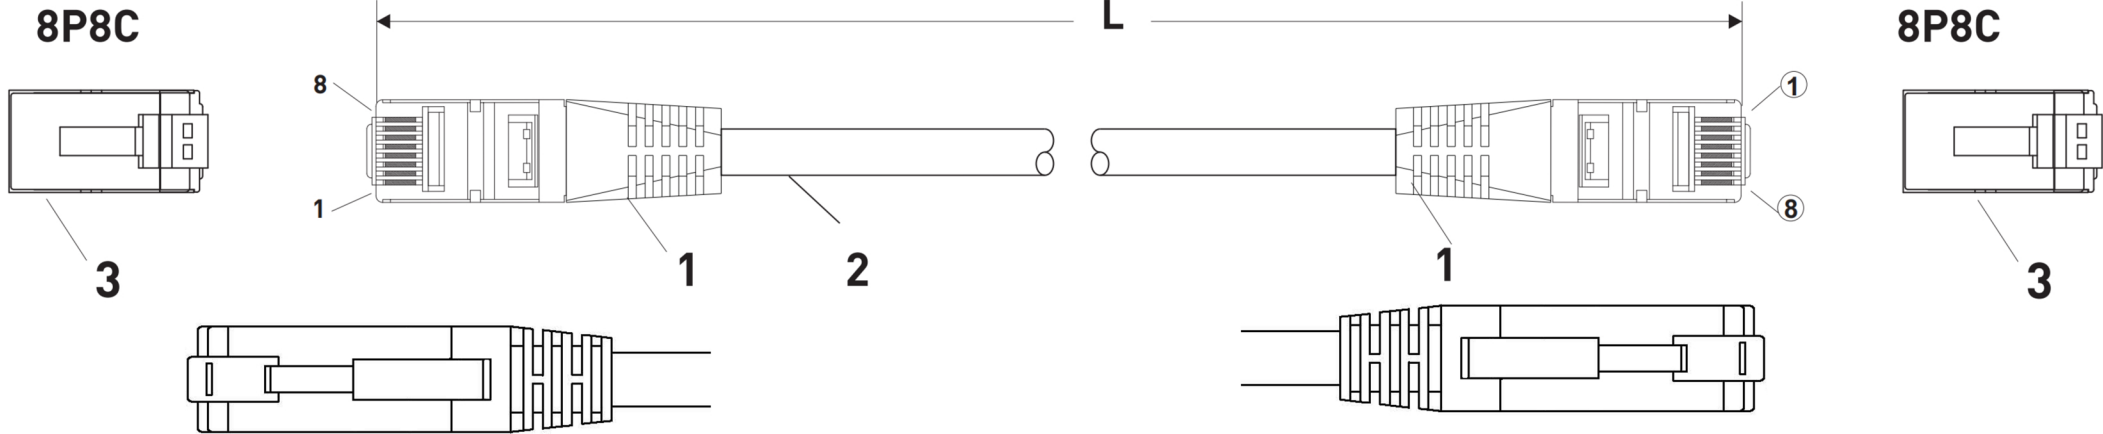

**Electrical tests:**

1. 100% open and short test.
2. Insulation resistance 3M Ohm @ 300V DC.
3. Fluke channel test pass.

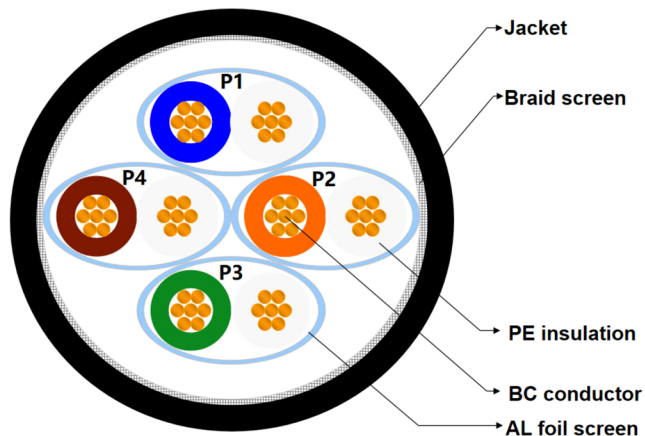

**Insulation Color**

P1	Blue
	White
P2	Orange
	White
P3	Green
	White
P4	Brown
	White

**CABLE CROSS-SECTION**

WIRE MAP		
P1		P2
1 White	↔	1 White
2 Orange		2 Orange
3 White	↔	3 White
6 Green		6 Green
4 Blue	↔	4 Blue
5 White		5 White
7 White	↔	7 White
8 Brown		8 Brown
SHELL		SHELL

No.	Description	Unit	Qty.
1	Outer mold PVC	pcs	2
2	SFTP Cat.8 -- 4×2×7/0.16mm stranded BC conductor + 1.0mm S-F-S PE insulation + 4×AL foil pairs screen + 80/0.12mm AL-MG braiding screen + 6.0mm PVC jacket	mm	L
3	Plug: Shielded Cat8 RJ45 connector, gold plated shielding, 8P8C, 3U' gold plated pin	pcs	2

Date	2021/03/31	
<b>PATCH CORD S/FTP CAT.8</b>		
Customer:	Custo.type:	
EXC Item:	Drawing No.: <b>PC-CAT8</b>	Customer confirmation
Draw by:	Checked by:	
Date:	Option: <b>No fixed scale</b>	
03/31/2021		Rev: 1.0

